


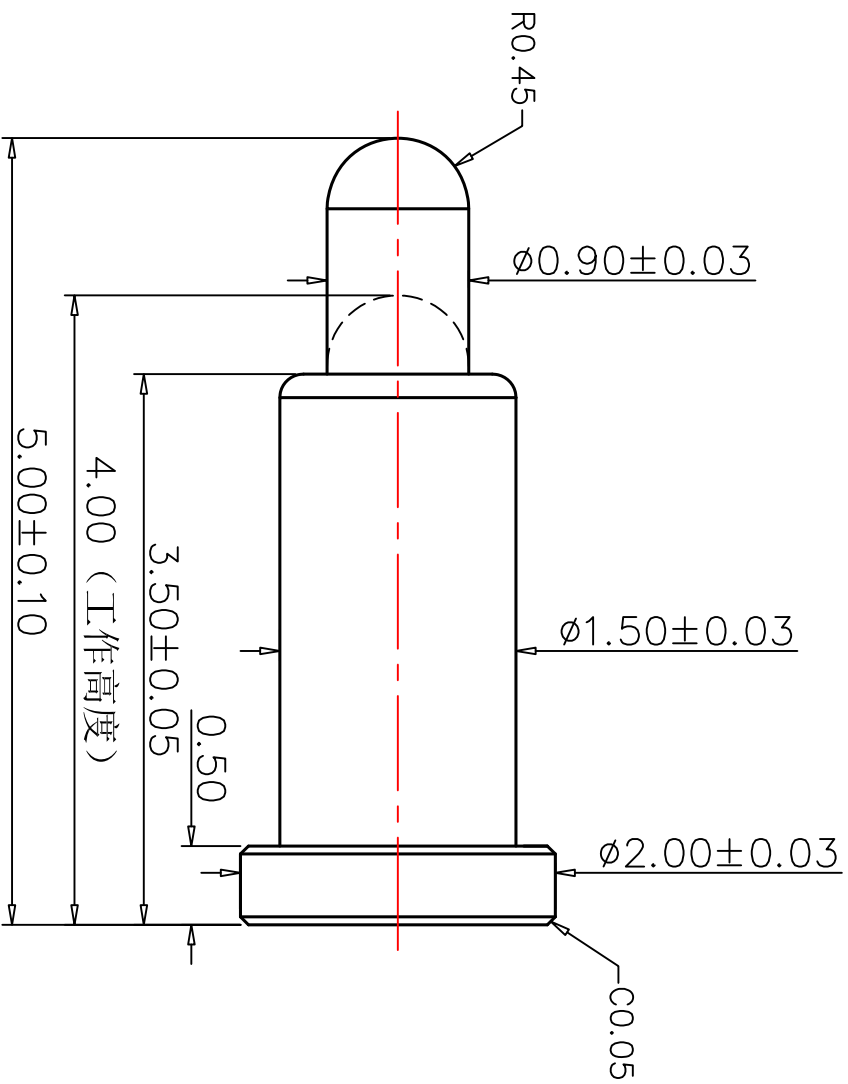

Note:

- 1: Material(材料) :
Barrel: Brass C3604 (针管: 黄铜 C3604)
Plunger: Brass C3604 (针头: 黄铜 C3604)
Spring: SUS 304 (弹簧: 不锈钢线 304)
- 2: Plating(电镀) :
Barrel: 1u' Au over 50~80u' Ni(针管: 镀金1u', 镍底50~80u'.)
Plunger: 1u' Au over 50~80u' Ni (针头: 镀金1u', 镍底50~80u'.)
Spring: 1u' Au over 50~80u' Ni (弹簧: 镀金1u', 镍底50~80u'.)
- 3: Electrical(电气特性):
Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12V,1A)
Contact Resistance: 50 mohm Max. at working height.
接触电阻: 最大50 毫欧 (在工作高度状态下)
- 4: Mechanical(机械性能):
Force: 120g±20% at working height. (120g±20% 在工作高度下)。
Stroke: 1.20mm. (全行程: 1.20mm)
Durability: 10000 cycles(min) (寿命: 10000 次)

DWG. NO.	ZXS-0035A	DESIGNED BY:		SCALE:	N/A	UNIT	mm
TITLE:	PG2.0x1.5x0.9x5.0	CHECKED BY:		SHEET:	1 of 1	PROJECTION	
		APPROVED BY:		DATE:	03.01.2012	VER.	A.0
LENGTH X.XX ±0.05mm X.X ±0.10mm X. ±0.20mm ANGLE X.XX ±0.50° X.X ±1.00° X. ±2.00°							
 深圳市忠信顺电子有限公司 www.zhongxinshun.com TEL: 0755-29944047 FAX: 0755-29944254							