


客户图

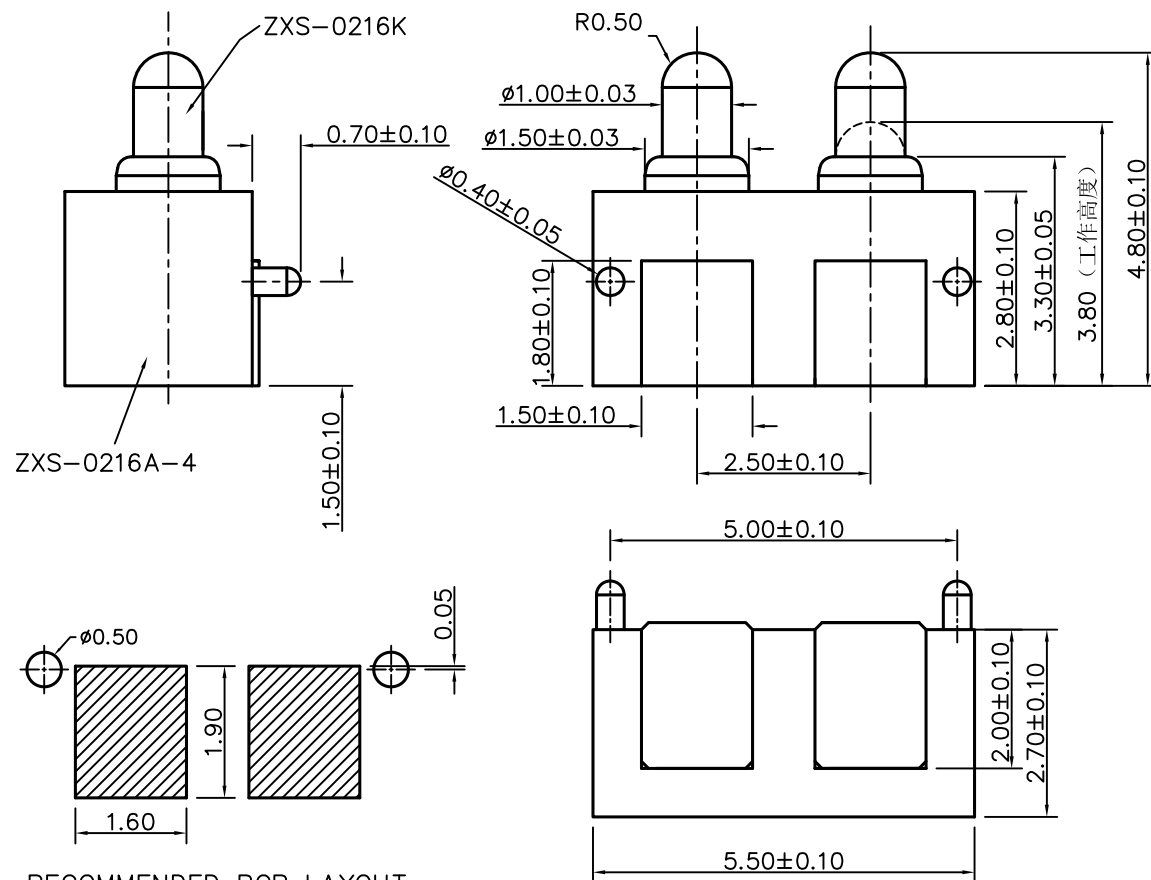

Note:

1: Material(材料) :

Housing: PA46 (胶芯: PA46)

Barrel: Brass C3604 (针管: 黄铜 C3604)

Plunger: Brass C3604 (针头: 黄铜 C3604)

Spring: SUS304 (弹簧: 不锈钢线SUS304)

2: Plating(电镀) :

Barrel: 3u' Au over 50~80u' Ni(针管: 镀金3u', 镍底50~80u'.)

Plunger: 3u' Au over 50~80u' Ni (针头: 镀金3u', 镍底50~80u'.)

Spring: 绝缘处理 (弹簧: 绝缘处理)

3: Electrical(电气特性):

Rated Current & Voltage: DC 12V;5A (额定电压&电流: 直流12,5A)

Contact Resistance: 50 mohm Max. at working height.

接触电阻: 最大50毫欧 (在工作高度状态下)

4: Mechanical(机械性能):

Force: 180g±20% at working height. (180g±20% 在工作高度)。

Full stroke:1.50mm (全冲程: 1.50mm)

Durability: 10000 cycles(min) (寿命: 10000次)

DWG. NO.	ZXS-0216KJ	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :				 深圳市忠信顺电子有限公司 www.zhongxinshun.com TEL:0755-29944047 FAX:0755-29944254			
TITLE:	PG2.1x1.5x1.0x4.80 (2Px2.5PH)	CHECKED BY:		SHEET:	1 of 1	PROJECTION		LENGTH	ANGLE						
		APPROVED BY:		DATE:	12.15.2018	VER.	A.0	X.XX ±0.05mm X.X ±0.10mm X. ±0.20mm	X.XX ±0.50° X.X ±1.00° X. ±2.00°						