

客户图

Note:

1: Material(材料) :

Housing: PA46 (胶芯: PA46)

Barrel: Brass C3604 (针管: 黄铜 C3604)

Plunger: Brass C3604 (针头: 黄铜 C3604)

Spring: SUS304 (弹簧: 不锈钢 SUS304)

2: Plating(电镀) :

Barrel: 3u' Au over 50~80u' Ni(针管: 镀金3u' , 镍底50~80u'。)

Plunger: 3u' Au over 50~80u' Ni (针头: 镀金3u' , 镍底50~80u'。)

Spring: 绝缘处理 (弹簧: 绝缘处理)

3: Electrical(电气特性):

Rated Current & Voltage: DC 12V;6.5A (额定电压&电流: 直流12V,6.5A)

Contact Resistance: 50 mohm Max. at working height.


接触电阻: 最大50毫欧 (在工作高度状态下)

4: Mechanical(机械性能):

Force: 110g±20% at working height.(110g±20%在工作高度时)

Full stroke: 1.30mm (全冲程: 1.30mm)

Durability: 10000 cycles(min) (寿命: 10000次)

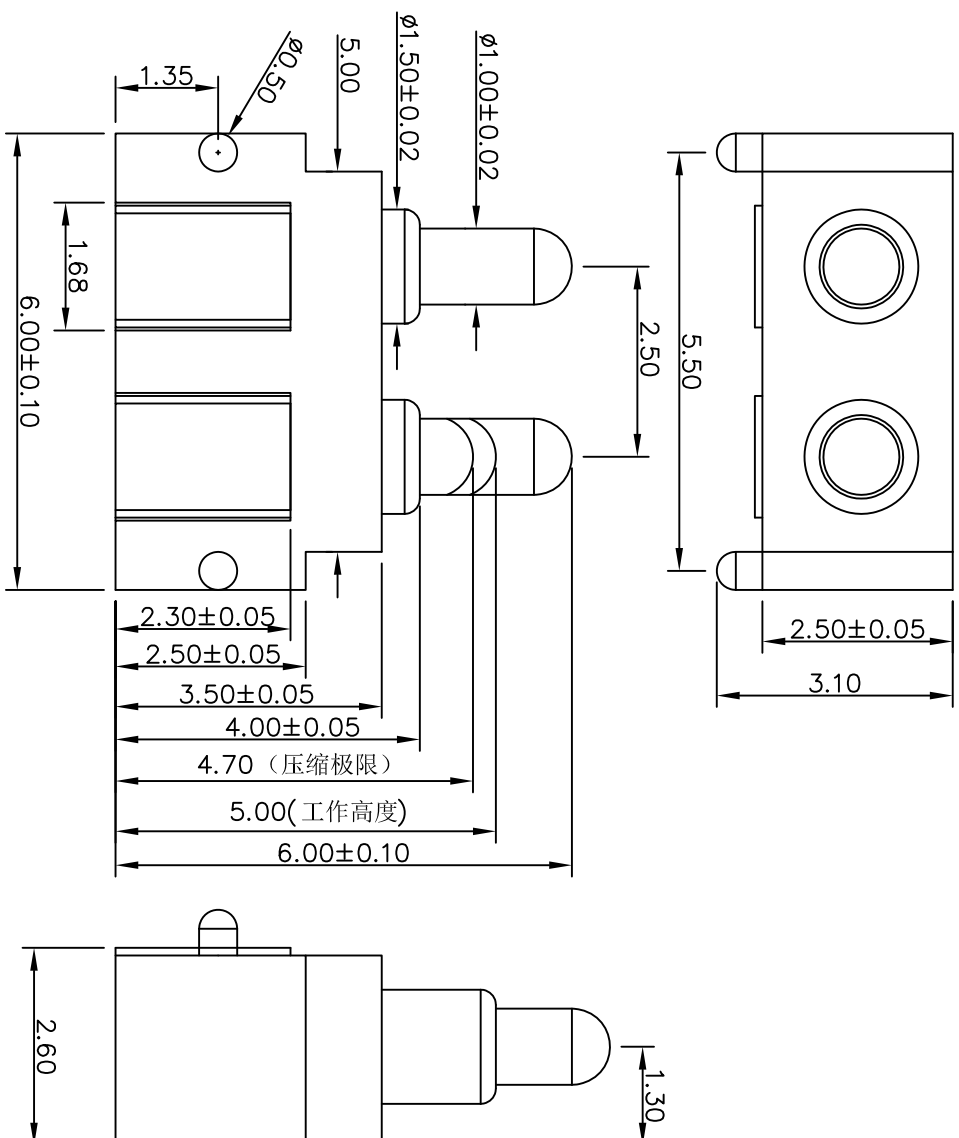

DWG. NO.	ZXS-1191ZJ	DESIGNED BY:	SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :						
TITLE:	PG6.0x3.10x6.0 (2x2.5PH)	CHECKED BY:	SHEET:	1 of 1	PROJECTION		LENGTH		ANGLE				
		APPROVED BY:	DATE:	12.20.2018	VER.	A.0	X.XX X.X X.	±0.05mm ±0.10mm ±0.20mm	X.XX X.X X.	±0.50° ±1.00° ±2.00°			
													
							东莞市深茂精密电子有限公司						
							http://www.gdshenmao.com/						
							TEL: 0769-81629844 FAX: 0769-81669504						