


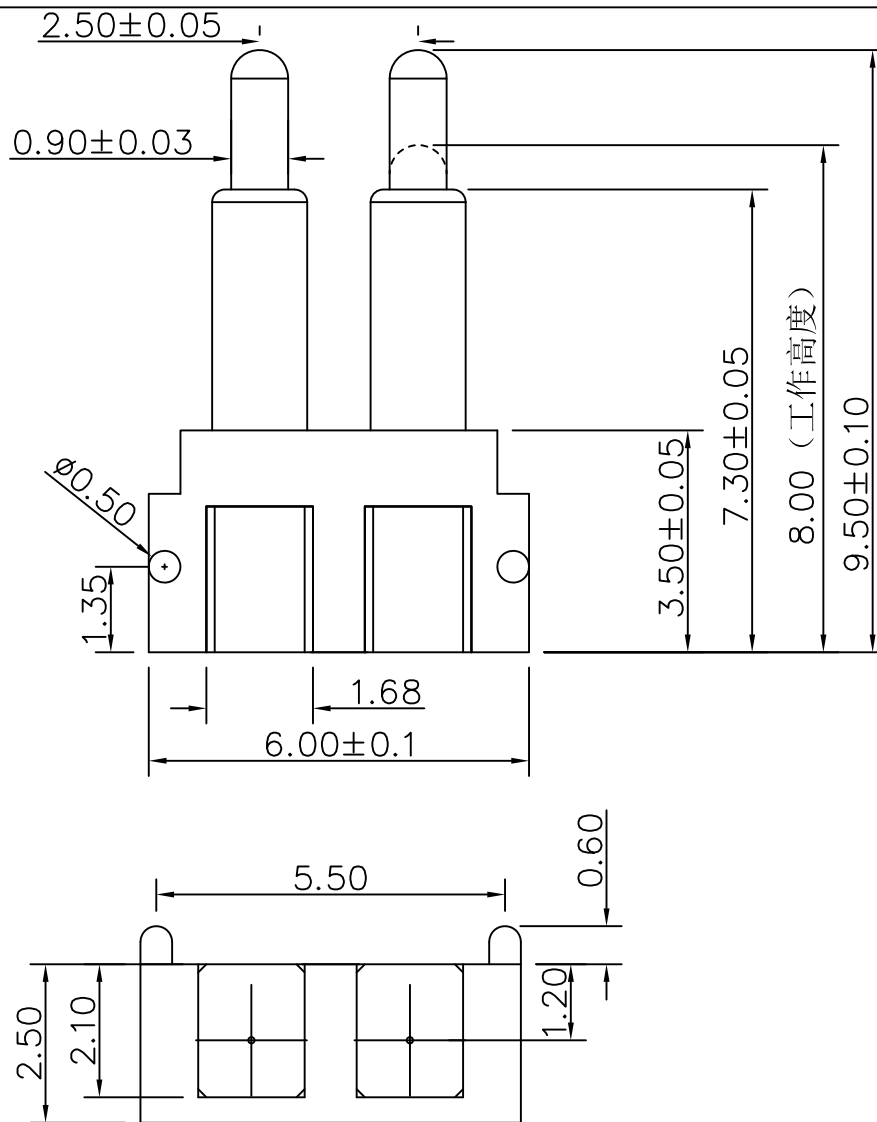

REVISIONS

No.	DESCRIPTION	DATE
1	修改卡位结构和弹簧表面处理方式	2019/04/16

Note:

1: Material(材料) :

Housing: PA46 (胶芯: PA46)

Barrel: Brass C3604 (针管: 黄铜 C3604)

Plunger: Brass C3604 (针头: 黄铜 C3604)

Spring: SUS304 (弹簧: 不锈钢 SUS304)

2: Plating(电镀) :

Barrel: 3u' Au over 50~80u' Ni(针管: 镀金3u', 镍底50~80u'.)

Plunger: 3u' Au over 50~80u' Ni (针头: 镀金3u', 镍底50~80u'.)

△ Spring: 绝缘处理 (弹簧: 绝缘处理)

3: Electrical(电气特性):

Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12V,1A)

Contact Resistance: 50 mohm Max. at working height.

接触电阻: 最大50毫欧 (在工作高度状态下)

4: Mechanical(机械性能):

Force: 50g±20% at working height.(50g±20%在工作高度时)

Full stroke: 2.20mm (全冲程: 2.20mm)

Durability: 10000 cycles(min) (寿命: 10000次)

DWG. NO.	ZXS-1191W1J	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW : LENGTH X.XX ±0.05mm X.X ±0.10mm X. ±0.20mm ANGLE X.XX ±0.50° X.X ±1.00° X. ±2.00°	东莞市深茂精密电子有限公司 TEL:0769-81629844 FAX:0769-81669504
TITLE:	PG1.60x2.10x0.9x9.5 (2x2.5PH)	CHECKED BY:		SHEET:	1 of 1	PROJECTION			
		APPROVED BY:		DATE:	12.23.2019	VER.	A.1		