


REVISIONS

No.	DESCRIPTION	DATE
△	修改卡位结构	2019/04/16

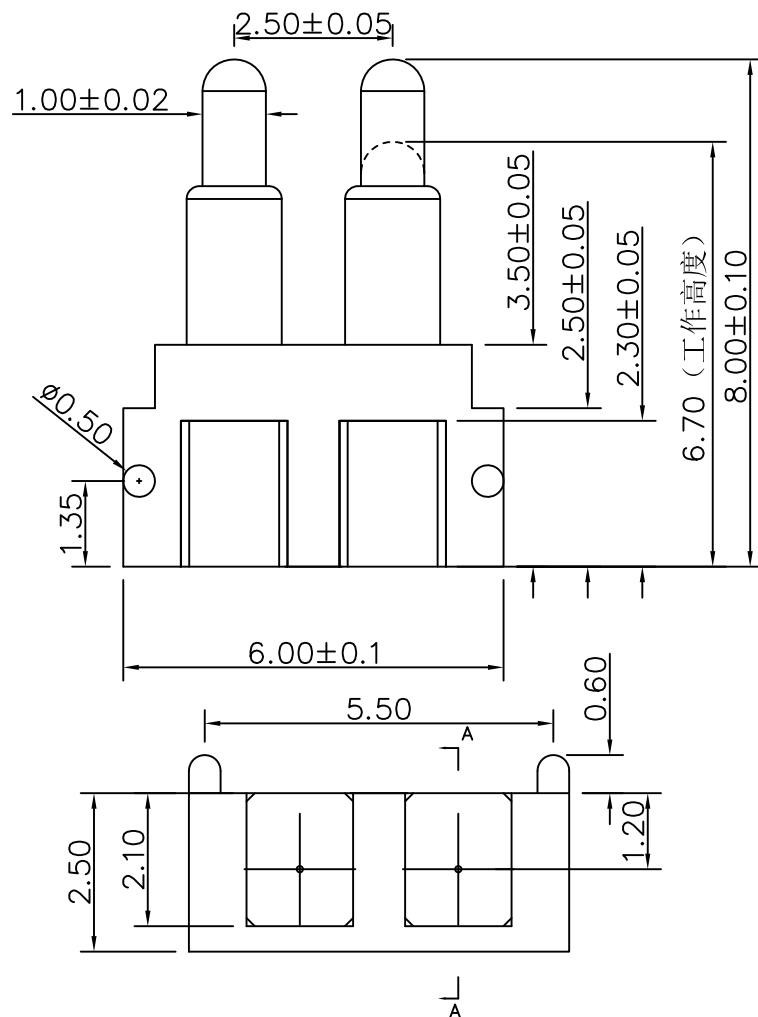

Note:

1: Material(材料) :

Housing: PA46 (胶芯: PA46)

Barrel: Brass C3604 (针管: 黄铜 C3604)

Plunger: Brass C3604 (针头: 黄铜 C3604)

Spring: SUS304 (弹簧: 不锈钢 SUS304)

2: Plating(电镀) :

Barrel: 3u' Au over 50~80u' Ni(针管: 镀金3u', 镍底50~80u'.)

Plunger: 3u' Au over 50~80u' Ni (针头: 镀金3u', 镍底50~80u'.)

△ Spring: 1u' Au over 20~50u' Ni (弹簧: 镀金1u', 镍底20~50u'.)

3: Electrical(电气特性):

Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12V,1A)

Contact Resistance: 50 mohm Max. at working height.


接触电阻: 最大50毫欧 (在工作高度状态下)

4: Mechanical(机械性能):

Force: 60g $\pm$ 20% at working height.(60g $\pm$ 20%在工作高度时)

Full stroke: 2.0mm (全冲程: 2.0mm)

Durability: 10000 cycles(min) (寿命: 10000次)

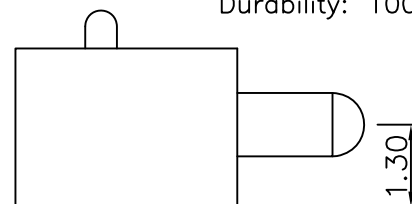

SECTION A-A

DWG. NO.	ZXS-1191XJ	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW : LENGTH ANGLE <table><tr><td>X.XX</td><td>±0.05mm</td><td>X.XX</td><td>±0.50°</td></tr><tr><td>X.X</td><td>±0.10mm</td><td>X.X</td><td>±1.00°</td></tr><tr><td>X.</td><td>±0.20mm</td><td>X.</td><td>±2.00°</td></tr></table>				X.XX	±0.05mm	X.XX	±0.50°	X.X	±0.10mm	X.X	±1.00°	X.	±0.20mm	X.	±2.00°	东莞市深茂精密电子有限公司 TEL:0769-81629844 FAX:0769-81669504	
X.XX	±0.05mm	X.XX	±0.50°																						
X.X	±0.10mm	X.X	±1.00°																						
X.	±0.20mm	X.	±2.00°																						
TITLE:	PG1.60x2.10x1.0x8.0 (2x2.5PH)	CHECKED BY:		SHEET:	1 of 1	PROJECTION																			
		APPROVED BY:		DATE:	12.10.2018	VER.	A.1																		