
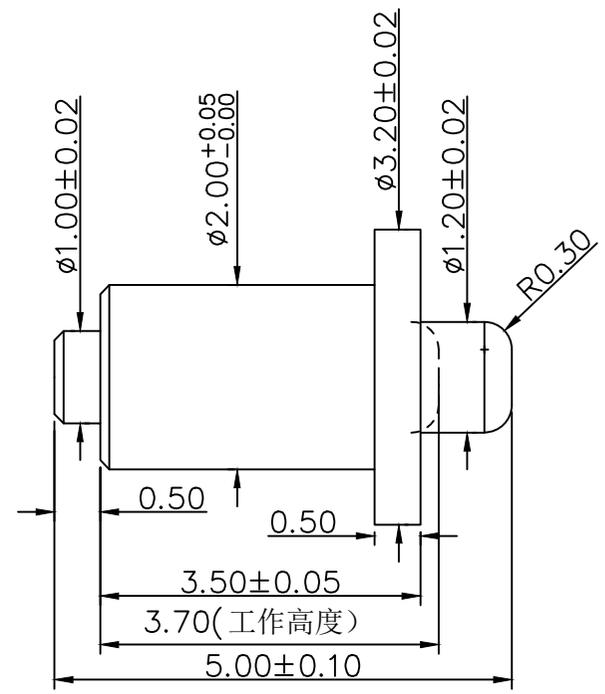


客户图



Note:

- Material(材料) :
 - Barrel: Brass C3604 (针管: 黄铜 C3604)
 - Plunger: Brass C3604 (针头: 黄铜 C3604)
 - Spring: SUS304 (弹簧: 不锈钢线 SUS304)
- Plating(电镀) :
 - Barrel: 5u' Au over 50~80u' Ni(针管: 镀金5u', 镍底50~80u'.)
 - Plunger: 5u' Au over 50~80u' Ni (针头: 镀金5u', 镍底50~80u'.)
 - Spring: 1u' Au over 20~50u' Ni (弹簧: 镀金1u', 镍底20~50u'.)
- Electrical(电气特性):
 - Rated Current & Voltage: DC 12V;1 A (额定电压&电流: 直流12,10A)
 - Contact Resistance: 50 mohm Max. at working height. (接触电阻: 最大50毫欧 (在工作高度状态下))
- Mechanical(机械性能):
 - Force: $30 \pm 20\%$ gf at working height. ($30 \pm 20\%$ gf 在工作高度)
 - Full stroke: 1.0mm (全冲程: 1.0mm)
 - Durability: 20000 cycles(min) (寿命: 20000次)

DWG. NO.	ZXS-2278D	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :		 东莞市深茂精密电子有限公司 http://www.gdshenmao.com/ TEL: 0769-81629844 FAX: 0769-81669504
TITLE:	1.0x2.0x3.2x1.2x5.0	CHECKED BY:		SHEET:	1 of 1	PROJECTION		LENGTH	ANGLE	
		APPROVED BY:		DATE:	04.26.2019	VER.	A.0	X.XX ±0.05mm	X.XX ±0.50°	
								X.X ±0.10mm	X.X ±1.00°	
								X. ±0.20mm	X. ±2.00°	