


客户图

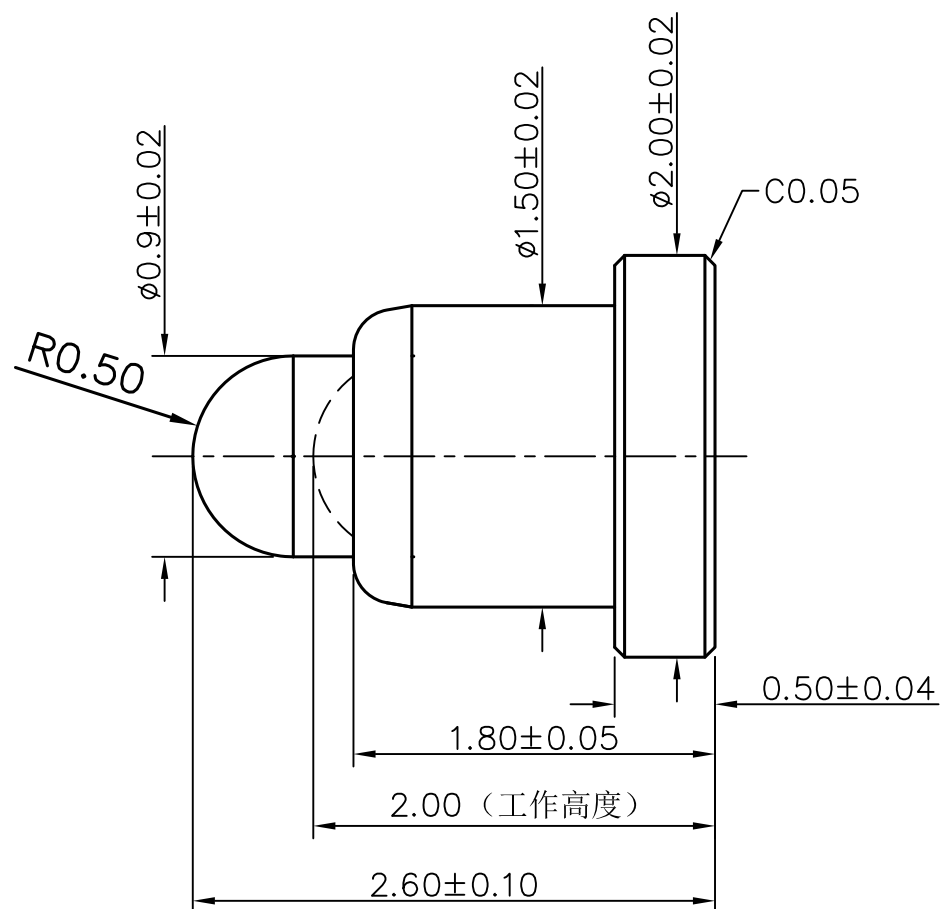

Note:

1: Material(材料) :

Barrel: Brass C3604 (针管: 黄铜 C3604)

Plunger: Brass C3604 (针头: 黄铜 C3604)

Spring: SUS304 (弹簧: 不锈钢线)

2: Plating(电镀) :

Barrel: 2u' Au over 50~80u' Ni(针管: 镀金2u', 镍底50~80u'.)

Plunger: 2u' Au over 50~80u' Ni (针头: 镀金2u', 镍底50~80u'.)

Spring: 1u' Au over 50~80u' Ni (弹簧: 镀金1u', 镍底50~80u')

3: Electrical(电气特性):

Rated Current & Voltage: AC 500V;1A (额定电压&电流: 交流500V,1A)

Contact Resistance: 100 mohm Max. at working height.

接触电阻: 最大100毫欧 (在工作高度状态下)

4: Mechanical(机械性能):

Force: 80±20G at working height. (80±20G 在工作高度)。

Full stroke:0.80mm (全冲程: 0.80mm)

Durability: 10000 cycles(min) (寿命: 10000次)

DWG. NO.	ZXS-0418E	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :					东莞市深茂精密电子有限公司 http://www.gdshenmao.com/ TEL: 0769-81629844
TITLE:	PG2.0x1.5x0.9x2.60	CHECKED BY:		SHEET:	1 of 1	PROJECTION		LENGTH		ANGLE			
		APPROVED BY:		DATE:	12.24.2015	VER.	A.0	X.XX	±0.05mm	X.XX	±0.50°		
								X.X	±0.10mm	X.X	±1.00°		
								X.	±0.20mm	X.	±2.00°		