


客户图

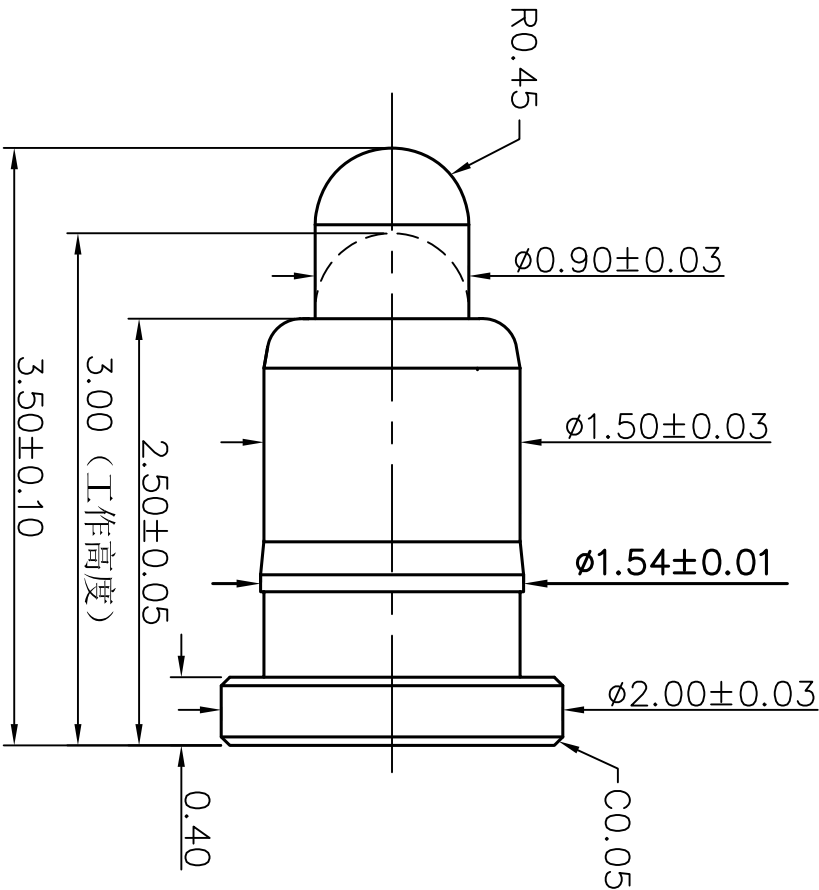

Note:

- 1: Material(材料) :
Barrel: Brass C3604 (针管: 黄铜 C3604)
Plunger: Brass C3604 (针头: 黄铜 C3604)
Spring: Music wire SWP (弹簧: 琴钢线 SWP)
- 2: Plating(电镀) :
Barrel: 1u' Au over 50~80u' Ni(针管: 镀金1u', 镍底50~80u'.)
Plunger: 1u' Au over 50~80u' Ni (针头: 镀金1u', 镍底50~80u'.)
Spring: 1u' Au over 50~80u' Ni (弹簧: 镀金1u', 镍底50~80u'.)
- 3: Electrical(电气特性):
Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12.1A)
Contact Resistance: 50 mohm Max. at working height.
接触电阻: 最大50毫欧 (在工作高度状态下)
- 4: Mechanical(机械性能):
Force: 80g $\pm$ 20% at working height. (80g $\pm$ 20% 在工作高度)。
Full stroke:0.80mm (全冲程: 0.80mm)
Durability: 10000 cycles(min) (寿命: 10000 次)

DWG. NO.	ZXS-0017A	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW : LENGTH ANGLE		深圳市忠信顺电子有限公司 www.zhongxinshun.com TEL: 0755-29944047 FAX: 0755-29944254	
TITLE:	PG2.0x1.5x0.9x3.5	CHECKED BY:		SHEET:	1 of 1	PROJECTION	A.0				
		APPROVED BY:		DATE:	02.23.2012	VER.					