


客戸

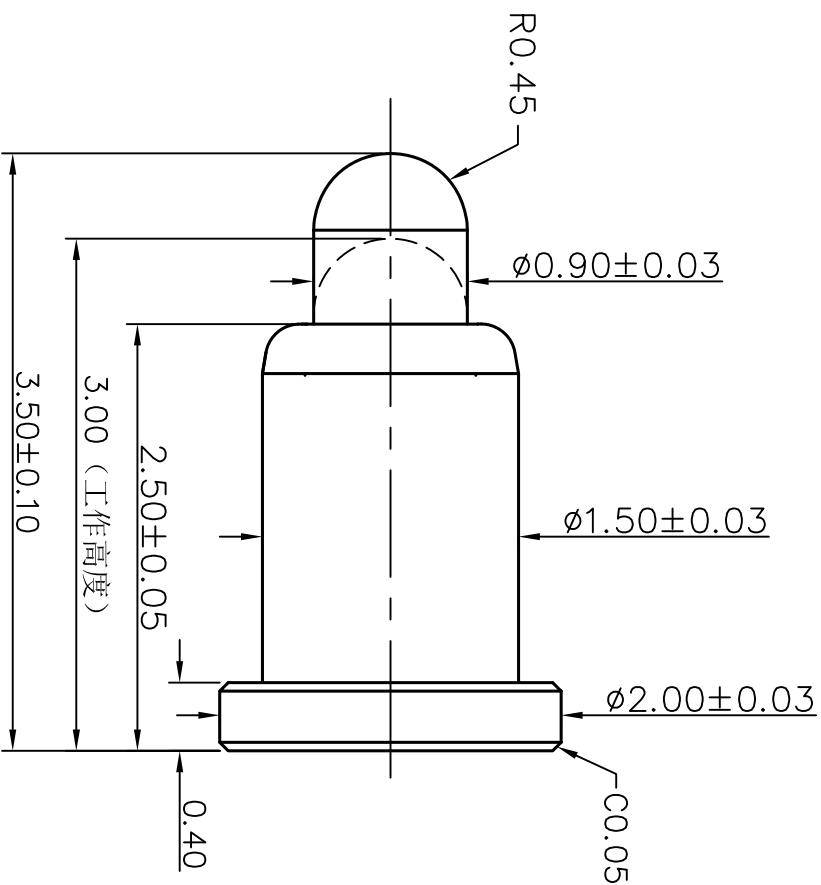

Note:

1: Material(材料) ::

Barrel: Brass C3604 (针管: 黄铜 C3604)

Plunger: Brass C3604 (针头: 黄铜 C3604)

Spring: Music wire SWP-B (弹簧: 琴钢线 SWP-B)

2: Plating(电镀):

Barrel: 1u' Au over 50~80u' Ni(针管: 镀金1u', 镍底50~80u'.)

Plunger: 1u' Au over 50~80u' Ni (针头: 镀金1u', 镍底50~80u'。)

Spring: 1u' Au over 50~80u' Ni (弹簧: 镀金1u', 镍底50~80u'。)

3: Electrical (电气特性):

Rated Current & Voltage: DC 12V,1A (额定电压&电流: 直流12,1A)

Contact Resistance: 50 mohm Max. at working height.

接触电阻：最大50毫欧（在工作高度状态下）

4: Mechanical (机械性能):

Force: $110\text{g} \pm 20\%$ at working height. ($110\text{g} \pm 20\%$ 在工作高度)。

Full stroke: 0.80mm (全行程: 0.80mm)

Durability: 10000 cycles(min) (寿命: 10000 次)

DWG. NO.	ZXS-0017B	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :			
TITLE:	PG2.0x1.5x0.9x3.5	CHECKED BY:		SHEET:	1 of 1	PROJECTION		LENGTH		ANGLE	
	APPROVED BY:			DATE:	02.23.2012	VER.	A.0	X.XX X.X X.	±0.05mm ±0.10mm ±0.20mm	X.XX X.X X.	±0.50° ±1.00° ±2.00°



深圳市忠信顺电子有限公司

www.zhongxinshun.com

TEL: 0755-29944047 FAX: 0755-29944254