


客户图

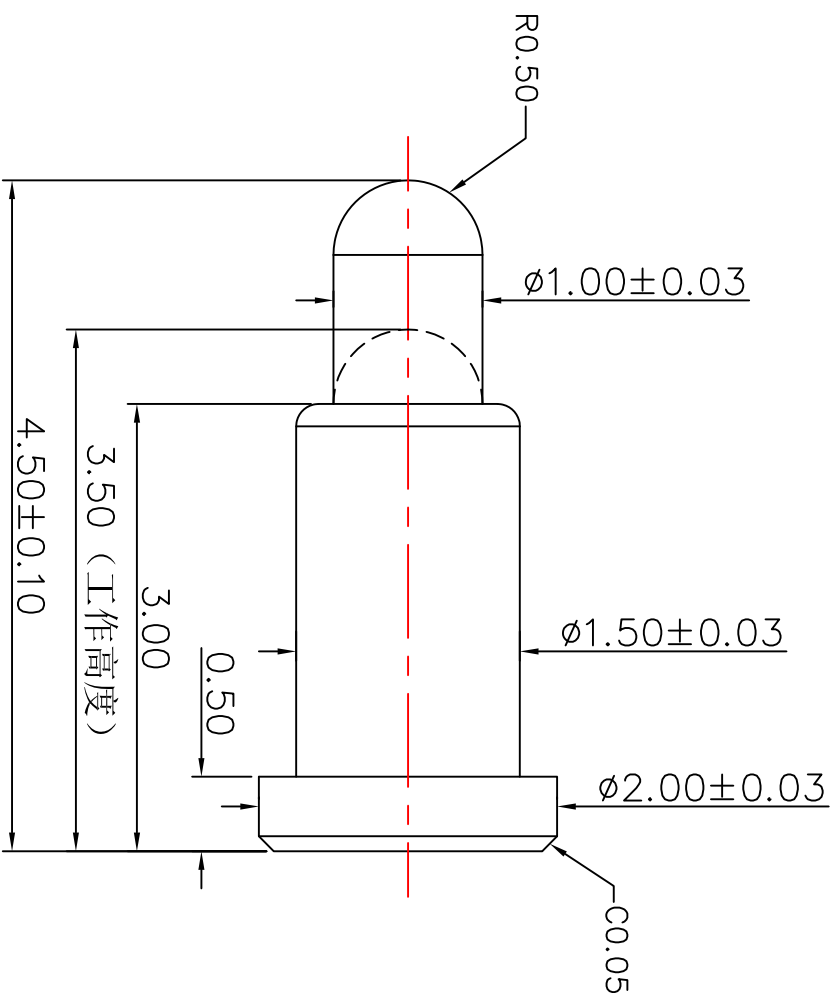

Note:

1: Material(材料) :

Barrel: Brass C3604 (针管: 黄铜 C3604)

Plunger: Brass C3604 (针头: 黄铜 C3604)

Spring: SWP-B (弹簧: 琴钢线SWP-B)

2: Plating(电镀) :

Barrel: 1u' Au over 50~80u' Ni(针管: 镀金1u', 镍底50~80u'.)

Plunger: 1u' Au over 50~80u' Ni (针头: 镀金1u', 镍底50~80u'.)

Spring: 1u' Au over 50~80u' Ni (弹簧: 镀金1u', 镍底50~80u'.)

3: Electrical(电气特性):

Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12V, 1A)

Contact Resistance: 50 mohm Max. at working height.

接触电阻: 最大50毫欧 (在工作高度状态下)

4: Mechanical(机械性能):

Force: 150g±20% at working height. (150g±20% 在工作高度下)。

Stroke: 1.30mm. (全行程: 1.30mm)

Durability: 10000 cycles(min) (寿命: 10000次)

DWG. NO.	ZXS-0072A	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :		
TITLE:	PG2.0x1.5x1.0x4.5	CHECKED BY:		SHEET:	1 of 1	PROJECTION		LENGTH	ANGLE	
		APPROVED BY:		DATE:	03.01.2012	VER.	A.0	X.XX X.X X.	X.XX X.X X.	±0.05° ±1.00° ±2.00°
										
								深圳市忠信顺电子有限公司		
								TEL.: 0755-29944047 FAX: 0755-29944254		
								www.zhongxinshun.com		