
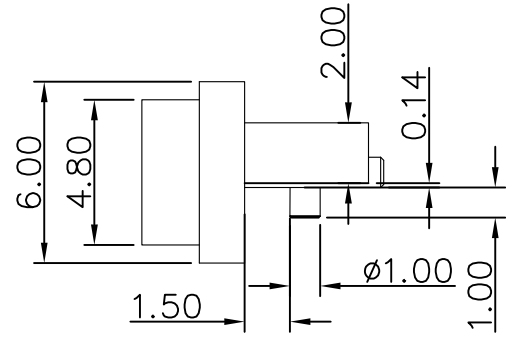


客户图

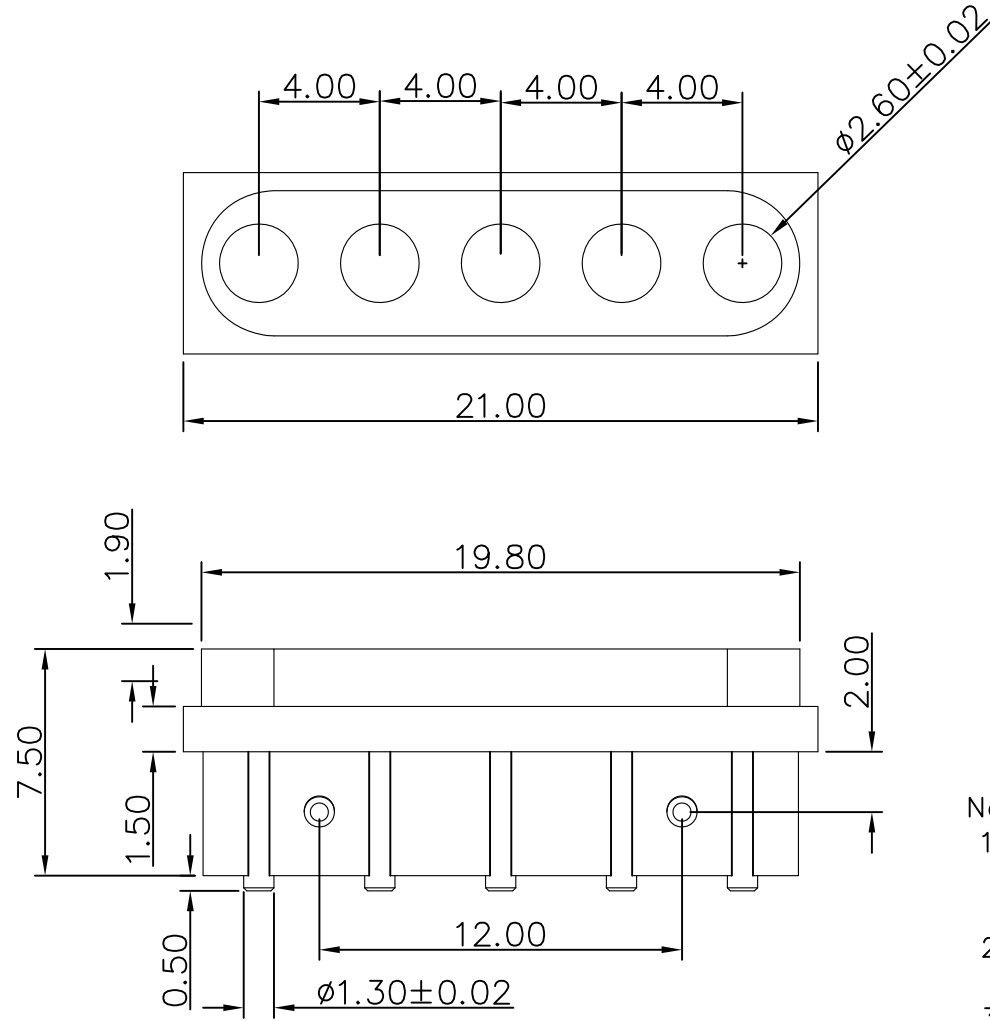

Note:

- Material(材料) :
Housing: PA46 (胶芯: PA46)
Plunger: Brass C3604 (针头: 黄铜 C3604)
- Plating(电镀) :
Plunger: 10u' Au over 50~120u' Ni (针头: 镀金10u', 镍底50~120u'.)
- Electrical(电气特性):
Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12V,1A)
Contact Resistance: 80 mohm Max. at working height.
接触电阻: 最大80毫欧 (在工作高度状态下)

DWG. NO.	ZXS-2254BJ	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :					东莞市深茂精密电子有限公司 http://www.gdshenmao.com/ TEL:0769-81629844 FAX:0769-81669504
TITLE:	PG2.60x1.0x8.0 (5P×4.0PH)	CHECKED BY:		SHEET:	1 of 1	PROJECTION		LENGTH		ANGLE			
		APPROVED BY:		DATE:	01.04.2019	VER.	A.0	X.XX ±0.05mm X.X ±0.10mm X. ±0.20mm	X.XX ±0.50° X.X ±1.00° X. ±2.00°				