
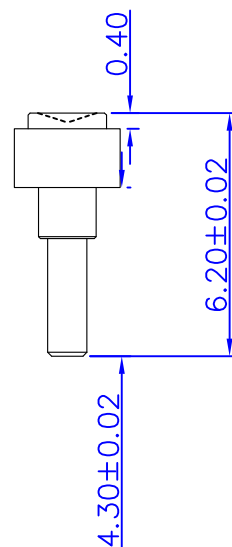


客户图

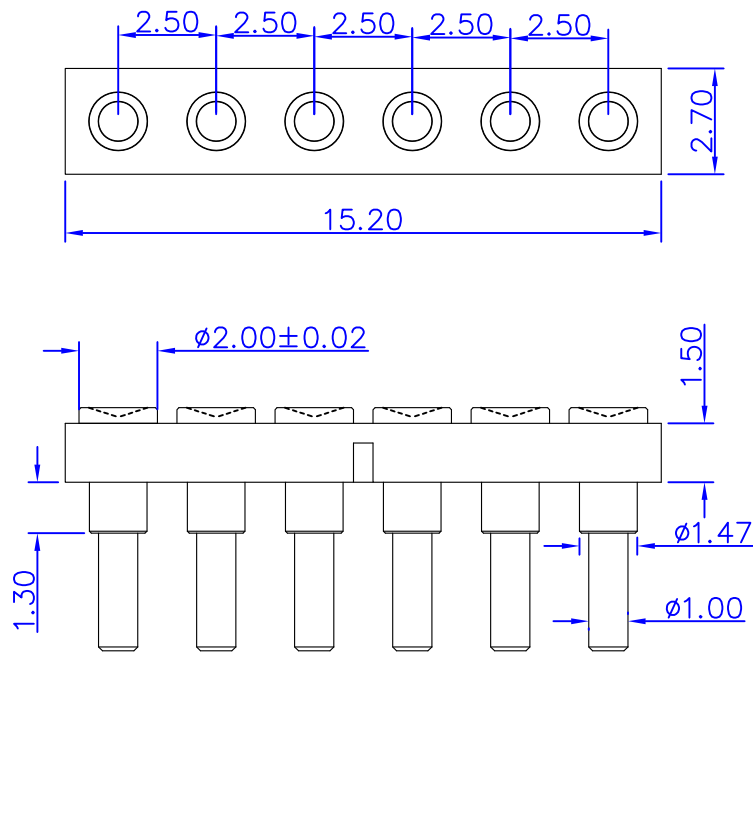

Note:

1: Material(材料) :

Housing: PA46 (胶芯: PA46)

Plunger: Brass C3604 (针头: 黄铜 C3604)

2: Plating(电镀) :

Plunger: 5u' Au over 50~80'u Ni (针头: 镀金5u', 镍底50~80u'.)

3: Electrical(电气特性):

Rated Current & Voltage: DC 12V; 2A (额定电压&电流: 直流12V, 2A)

Contact Resistance: 50 mohm Max. at working height.

接触电阻: 最大50毫欧 (在工作高度状态下)

DWG. NO.	ZXS—2215DJ	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :					东莞市深茂精密电子有限公司 http://www.gdshenmao.com/ TEL:0769—81629844 FAX:0769—81669504
TITLE:	PG: 2.0x1.47x1.0x6.2 (6P×2.5PH 母座)	CHECKED BY:		SHEET:	1 of 1	PROJECTION		LENGTH		ANGLE			
		APPROVED BY:		DATE:	12.01.2018	VER.	A.0	X.XX X.X X.	±0.05mm ±0.10mm ±0.20mm	X.XX X.X X.	±0.50° ±1.00° ±2.00°		