


客户图

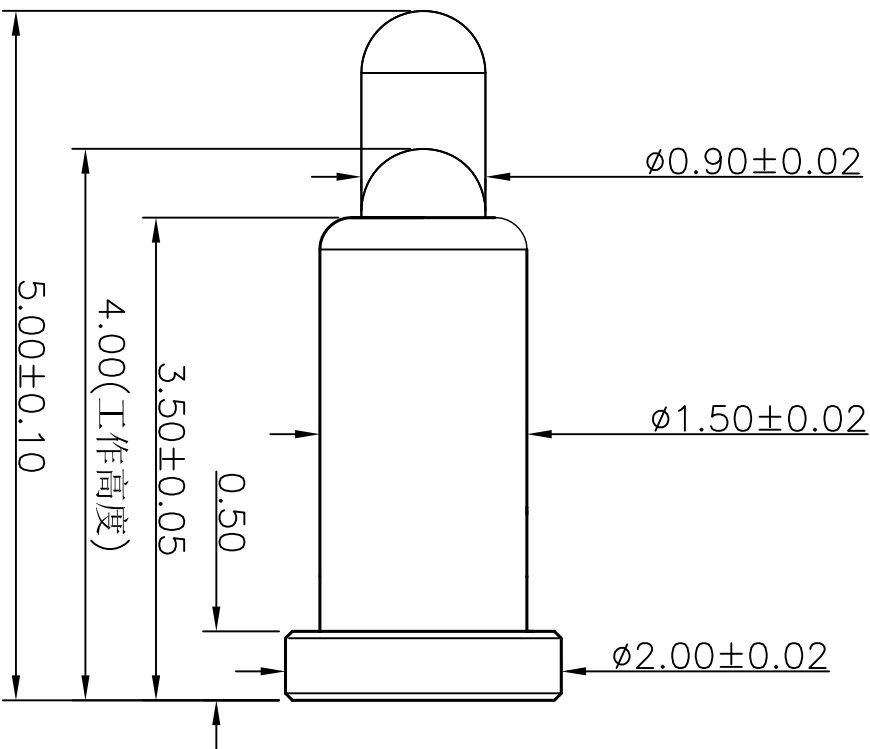

Note:

1: Material(材料) :

Barrel: Brass C3604 (针管: 黄铜 C3604)

Plunger: Brass C3604 (针头: 黄铜 C3604)

Spring: SUS304 (弹簧: 不锈钢线SUS304)

2: Plating(电镀) :

Barrel: 1u' Au over 50~80u' Ni(针管: 镀金1u', 镍底50~80u'。)

Plunger: 1u' Au over 50~80u' Ni (针头: 镀金1u', 镍底50~80u'。)

Spring: 1u' Au over 20~50u' Ni (弹簧: 镀金1u', 镍底20~50u'。)

3: Electrical(电气特性):

Rated Current & Voltage: DC 12V,1A (额定电压& 电流: 直流12V,1A)

Contact Resistance: 30 mohm Max. at working height.

接触电阻: 最大30 毫欧 (在工作高度状态下)

4: Mechanical(机械性能):

Force: 60—80gf at working height.(60—80gf在工作高度时)

Full stroke: 1.50mm (全冲程: 1.50mm)

Durability: 10000 cycles(min) (寿命: 10000 次)

DWG. NO.	ZXS-0035P	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :		
TITLE:	PG2.0x1.5x0.9x5.0	CHECKED BY:		SHEET:	1 of 1	PROJECTION		LENGTH	ANGLE	 东莞市深茂精密电子有限公司 http://www.gdsheima.com/ TEL:0769-81629844 FAX:0769-81669504
		APPROVED BY:		DATE:	07.11.2019	VER.	A.0	X.XX X.X X.	X.XX X.X X. ±0.05mm ±0.10mm ±0.20mm ±0.50° ±1.00° ±2.00°	