


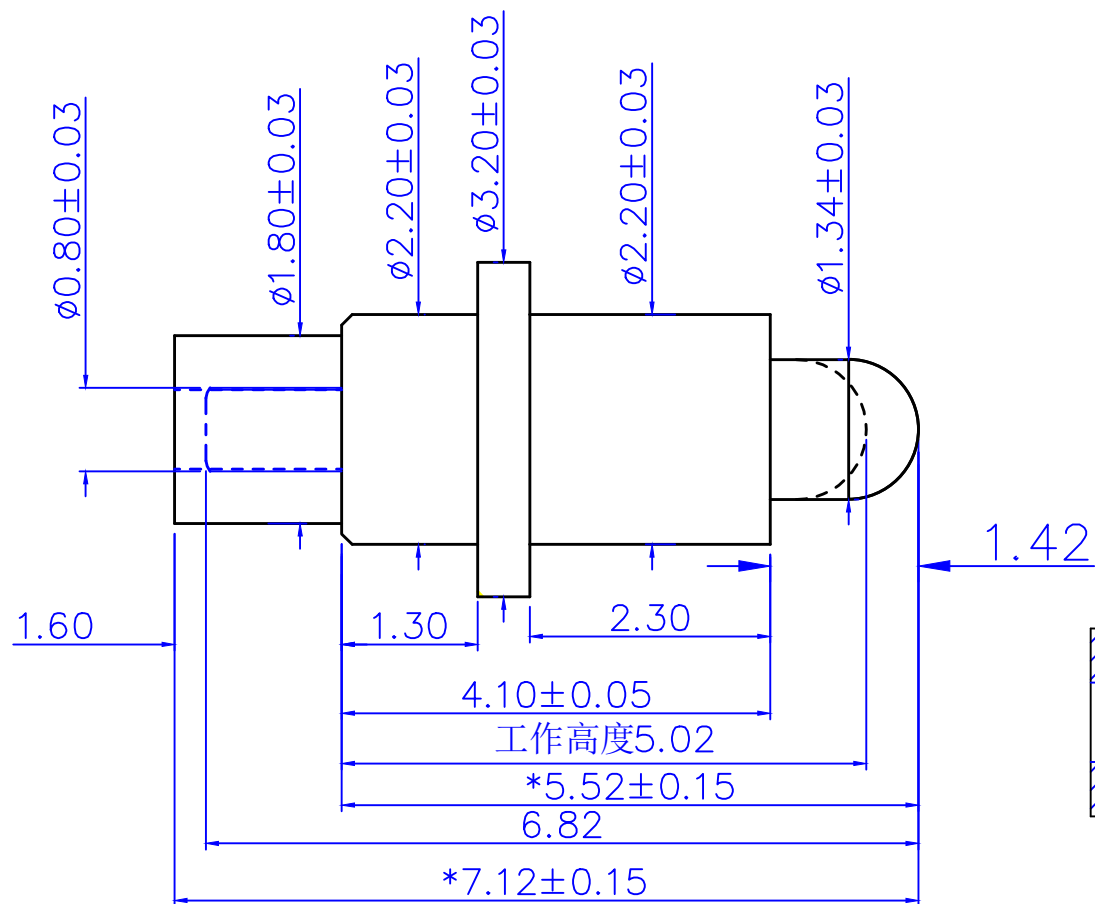

Note:

1: Material(材料) :

Barrel: Brass C3604 (针管: 黄铜 C3604)

Plunger: Brass C3604 (针头: 黄铜 C3602)

Spring: 磷铜 (弹簧: 磷铜)

2: Plating(电镀) :

Barrel: 5u' Au over 50~120u' Ni(针管: 镀金5u', 镍底50~120u'.)

Plunger: 5u' Au over 50~120u' Ni (针头: 镀金5u', 镍底50~120u'.)

Spring: 1u' Au over 20~50u' Ni (针头: 镀金1u', 镍底20~50u'.)

3: Electrical(电气特性):

Rated Current & Voltage: DC 12V;4A (额定电压&电流: 直流12,4A)

Contact Resistance: 50 mohm Max. at working height.


接触电阻: 最大50毫欧 (在工作高度状态下)

4: Mechanical(机械性能):

Force: 50g± 5gf at working height. (50g± 20gf 在工作高度)。

Full stroke:1.3mm (全冲程: 1.3mm)

Durability: 10000 cycles(min) (寿命: 10000次)

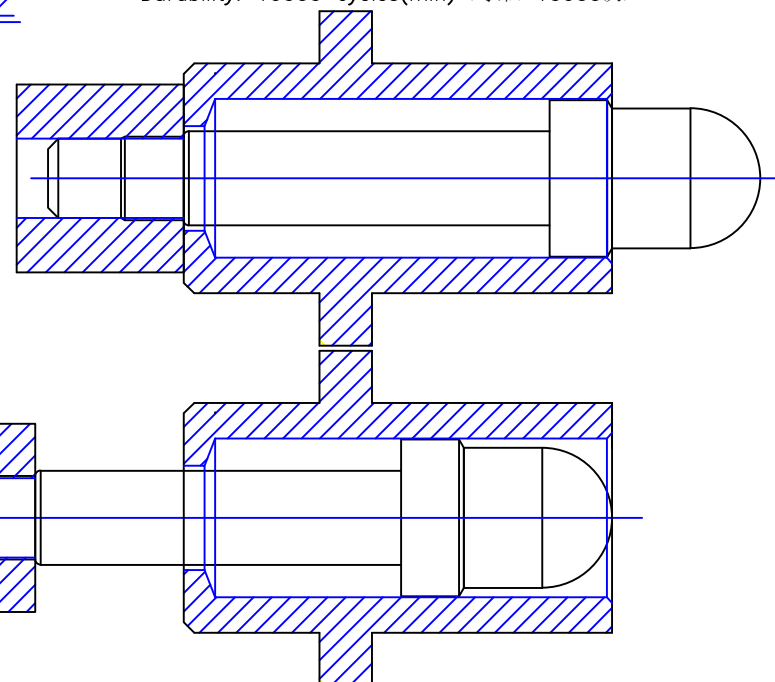

DWG. NO.	ZXS-2472A	DESIGNED BY:		SCALE:	N/A	UNIT	mm	THE UNMARKED TOLERANCE ARE AS BELOW :					东莞市深茂精密电子有限公司 http://www.dgsmjm.com TEL:0769-81629844 FAX:0769-81669504
TITLE:	PG1.8x2.2x3.2x2.2x7.12	CHECKED BY:		SHEET:	1 of 1	PROJECTION		LENGTH		ANGLE			
		APPROVED BY:	DATE:	09.19.2019	VER.	A.0	X.XX	±0.05mm	X.XX	±0.50°			
							X.X	±0.10mm	X.X	±1.00°			
							X.	±0.20mm	X.	±2.00°			